

Annual Repairs – TIF System


Annual Repairs – Parking System

AGENDA




General Repairs



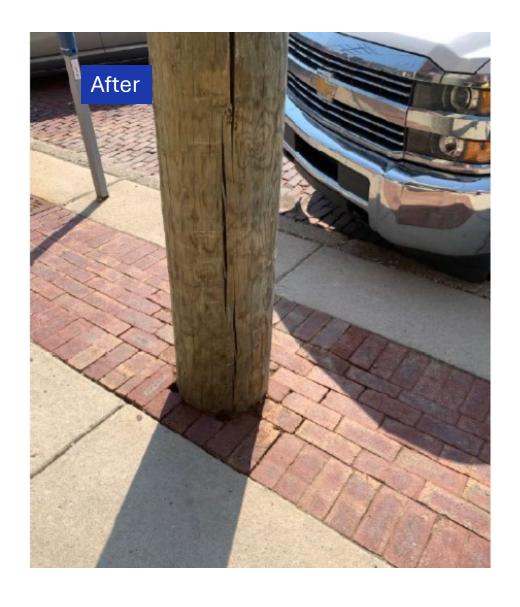

General Repairs

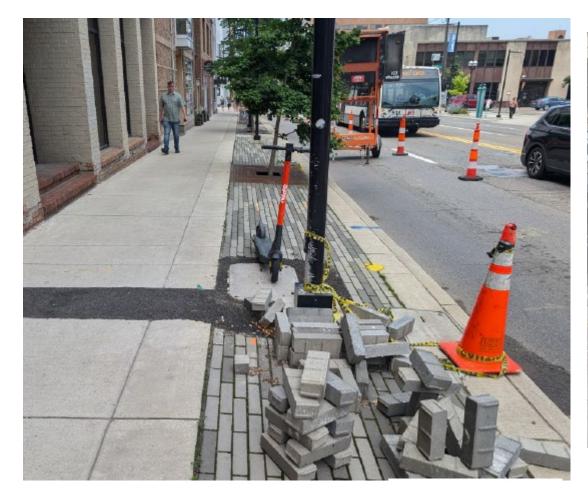



Sidewalk Brick Replacement





Modifications to Enhance Accessibility



REMOVE 1S FT X 2FT BRICK PAVER FOR TRUNCATED DOMES PER CITY OF ANN ARBOR STANDARD. CLEAN CONCRETE BASE FOR NEW 4" CONCRETE PAVEMENT MATCHING EXISTING ON ALL SIGES. EMBED TRUNCATED DOMES INTO NEW CONCRETE PAVEMENT. 2" WIDE X 15 LONG X 4"THICK.


REMOVE 15 FT X 1FT OF BRICK PAVERS FOR ARMOR TILE DETECTABLE STRIP. CLEAN CONCRETE BASE FOR NEW AT CONCRETE PAYMENT MATCHING EXISTING ON ALL SIDES. EMBED ARMOR TILE INTO NEW CONCRETE PAVEMENT. 1' WIDE X 15' LONG X 4" THICK.

PROTECT EXISTING TRUNCATED DOMES AT ALL TIMES PROTECT EXISTING CONCRETE SIDEWALK AT ALL TIMES.


INSTALL VAPOR BARRIER PRIOR TO PLACING CONCRETE PAVEMENT.

Landscape Maintenance




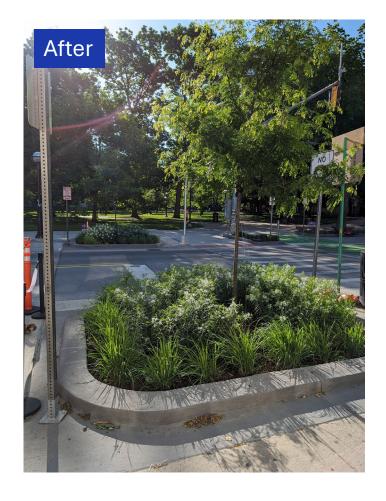

Amenity Zone & Tree Grate Repairs

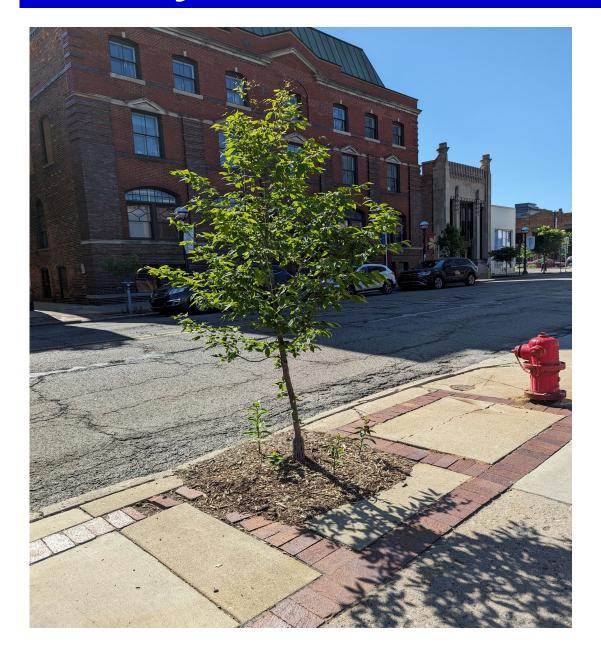



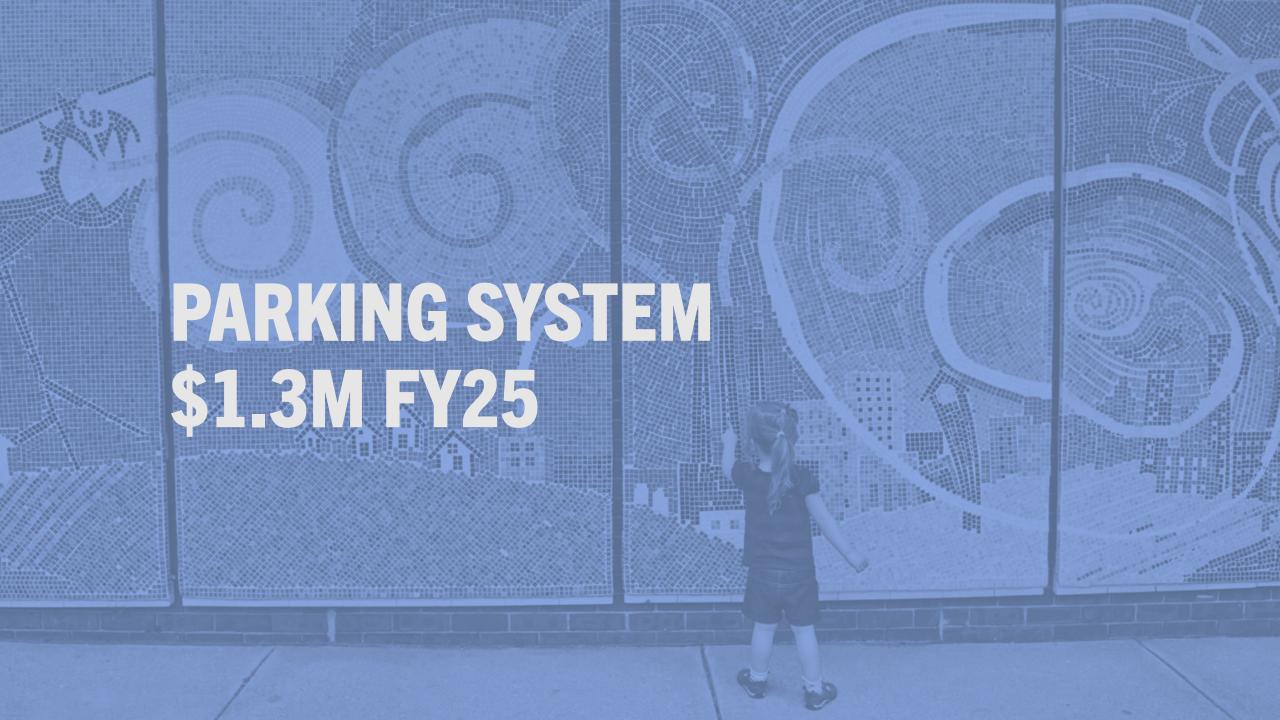

Concrete Repairs





Trench Drains





1.8 Acres of Deck Coating





Fire Suppression System Maintenance





