



Nixon Road Improvement Project Public Meeting

4/16/2025

Transportation Commission Meeting

John Tanner – Construction Project Manager
Chris Wall – City Project Manager



Project Area

- Nixon Road from Huron Parkway to Dhu Varren/Green Road (0.8 miles)
- Major Road
 - Residential area
 - 3 schools
 - Bound by 2 existing roundabouts
 - Growing corridor



Citywide Goals



Vision Zero

“By 2025, no one dies or is seriously injured in crashes on Ann Arbor’s streets”



Speed
Reductions



Buffers &
Reduced
Crossing
Widths



Carbon Neutrality

“By 2030, our transportation system contributes zero emissions toward climate change”



Green
Modes




Reduced
Emissions

Project Overview

- Three Roundabouts (2017 study preferred alternative)
 - Reduced user delays, improved access, reduced speeds
 - *Continuation of past Nixon Road Corridor Traffic Study
- Continuous & Protected Bike Lanes
- Added Pedestrian Crosswalks
 - Raised Crosswalks at Traver & Nixon Roundabout
- Sidewalk connectivity
- Increased transit facilities & coordination w/ AAPS
- Complete Road Reconstruction with Watermain & Stormwater Improvements


Timeline

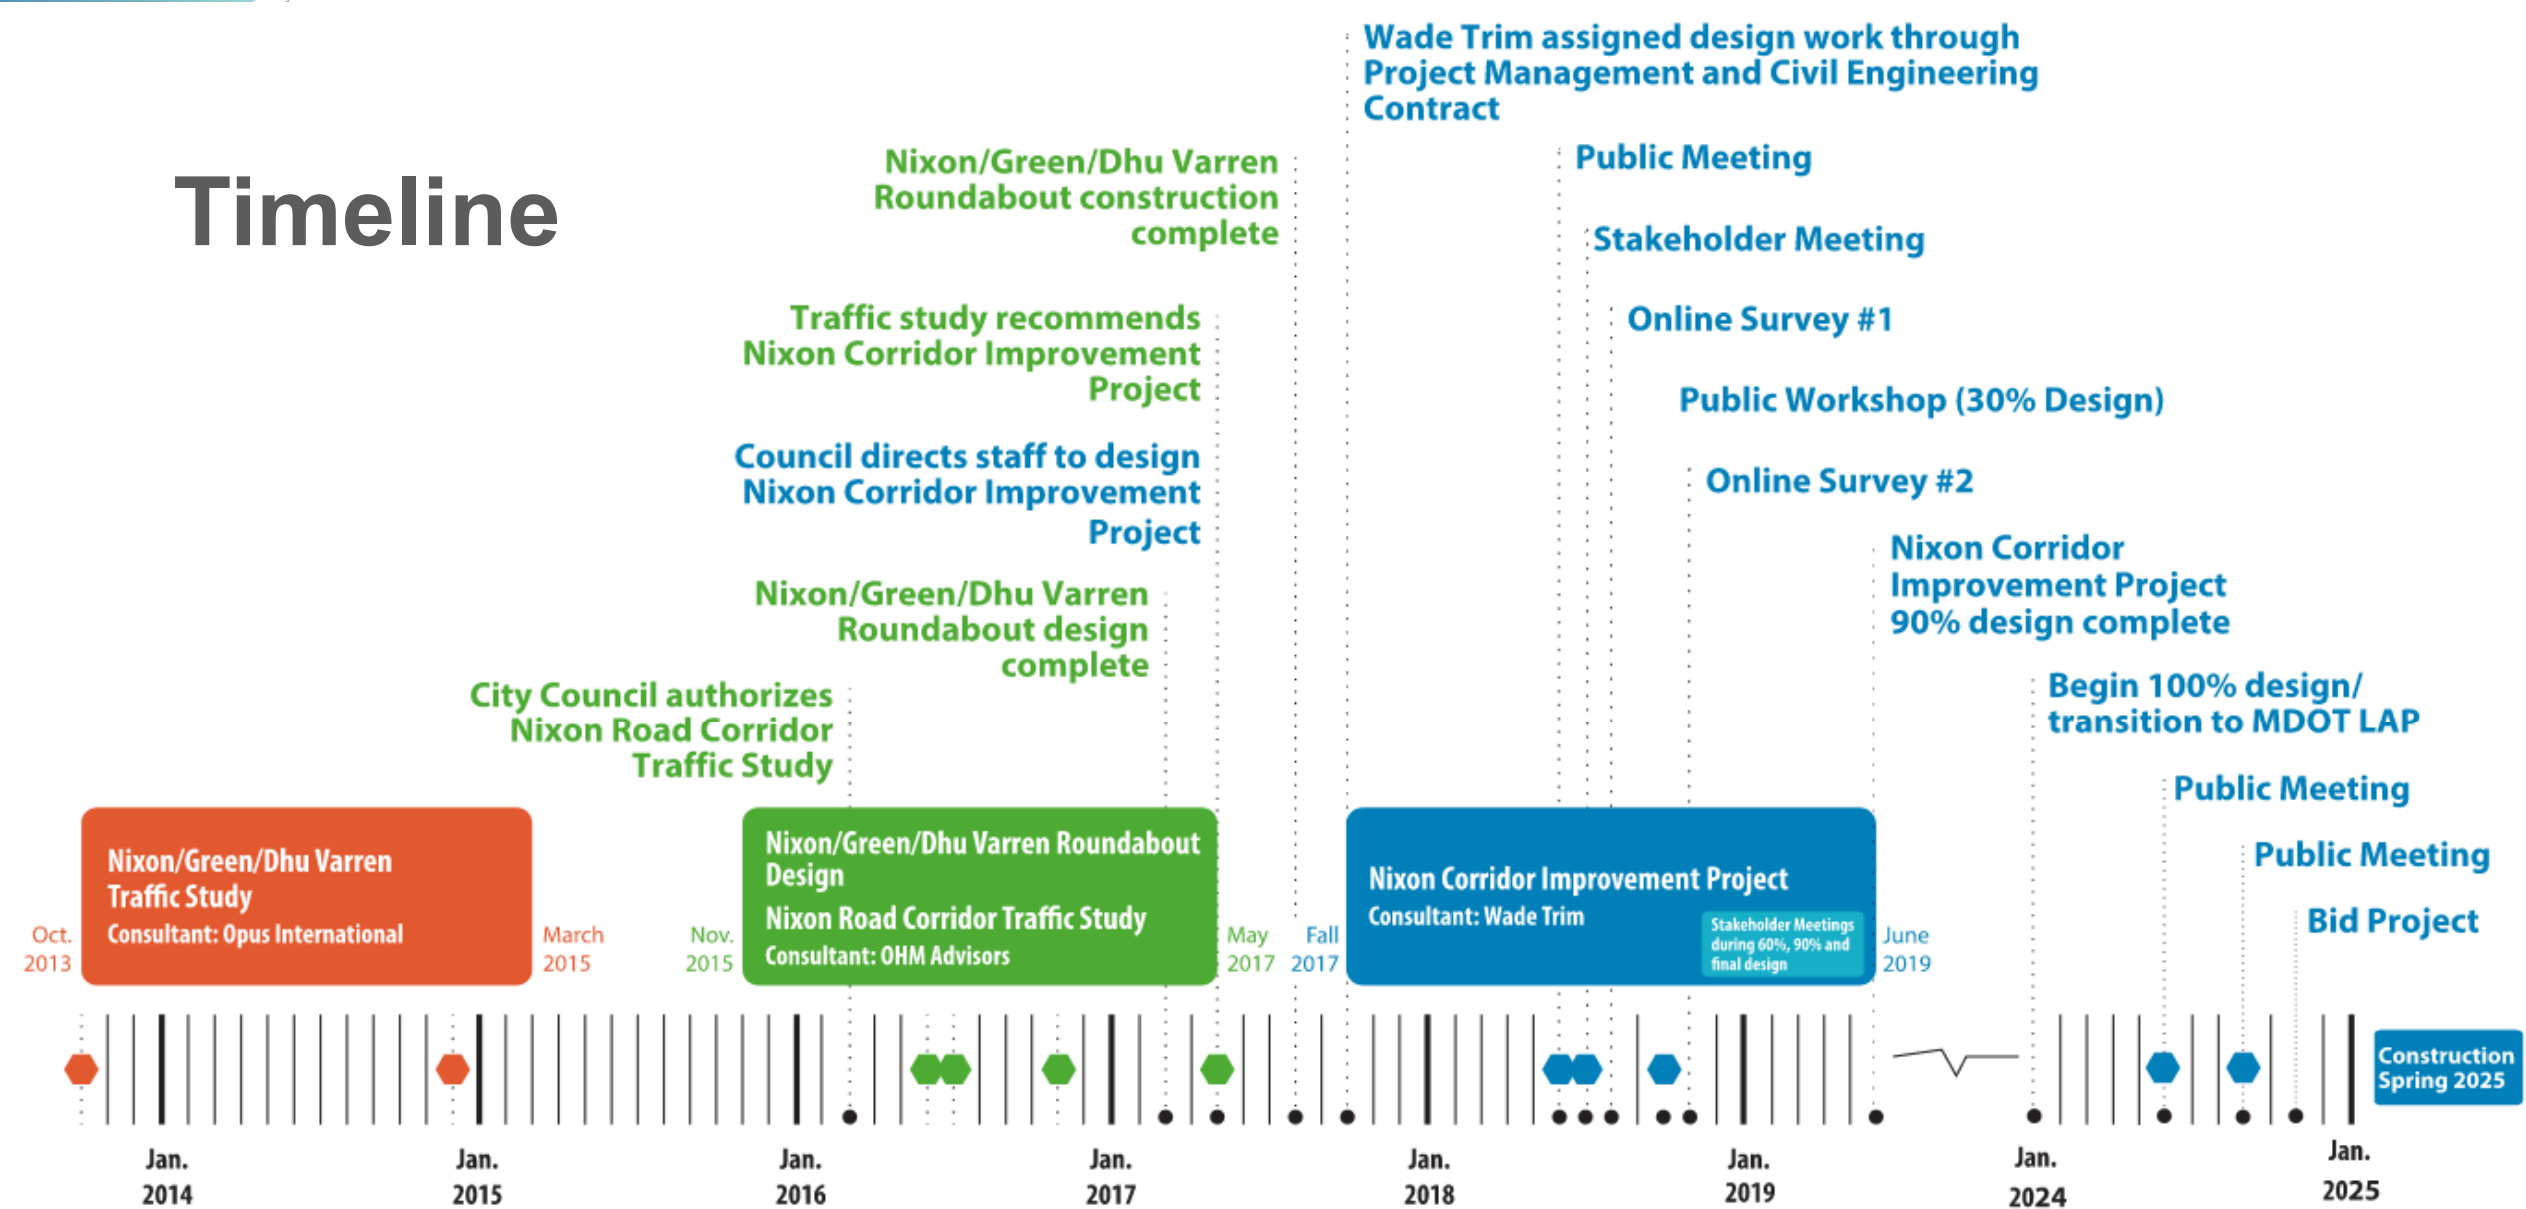


Phase 1 – Huron Pkwy to Sandalwood Cir (North)



Phase 2 – Bluett Dr to Traver Blvd

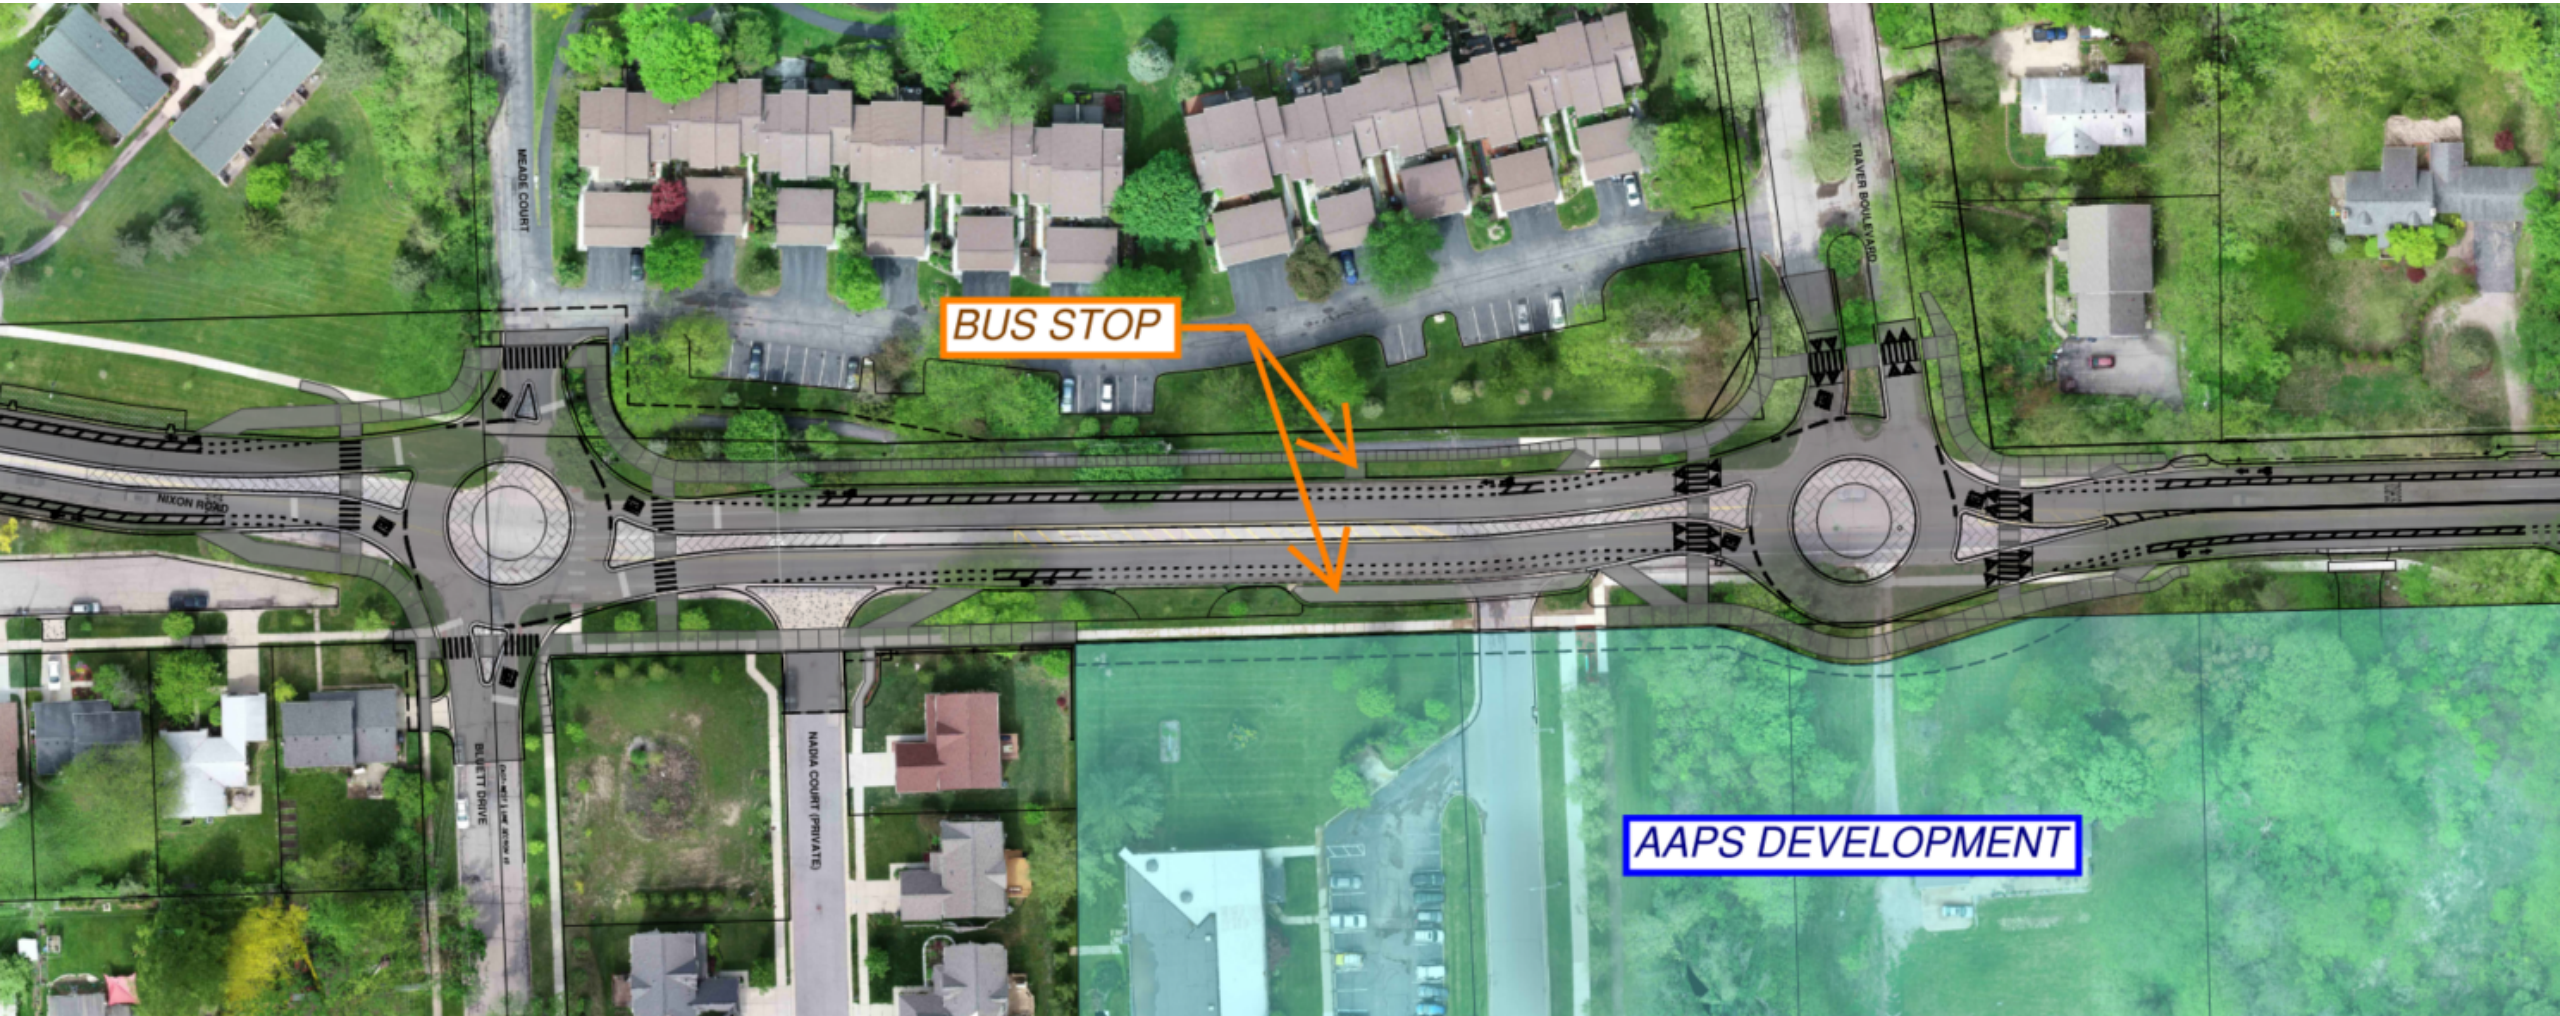

Phase 3 – Argonne Dr to Dhu Varren/Green Rd

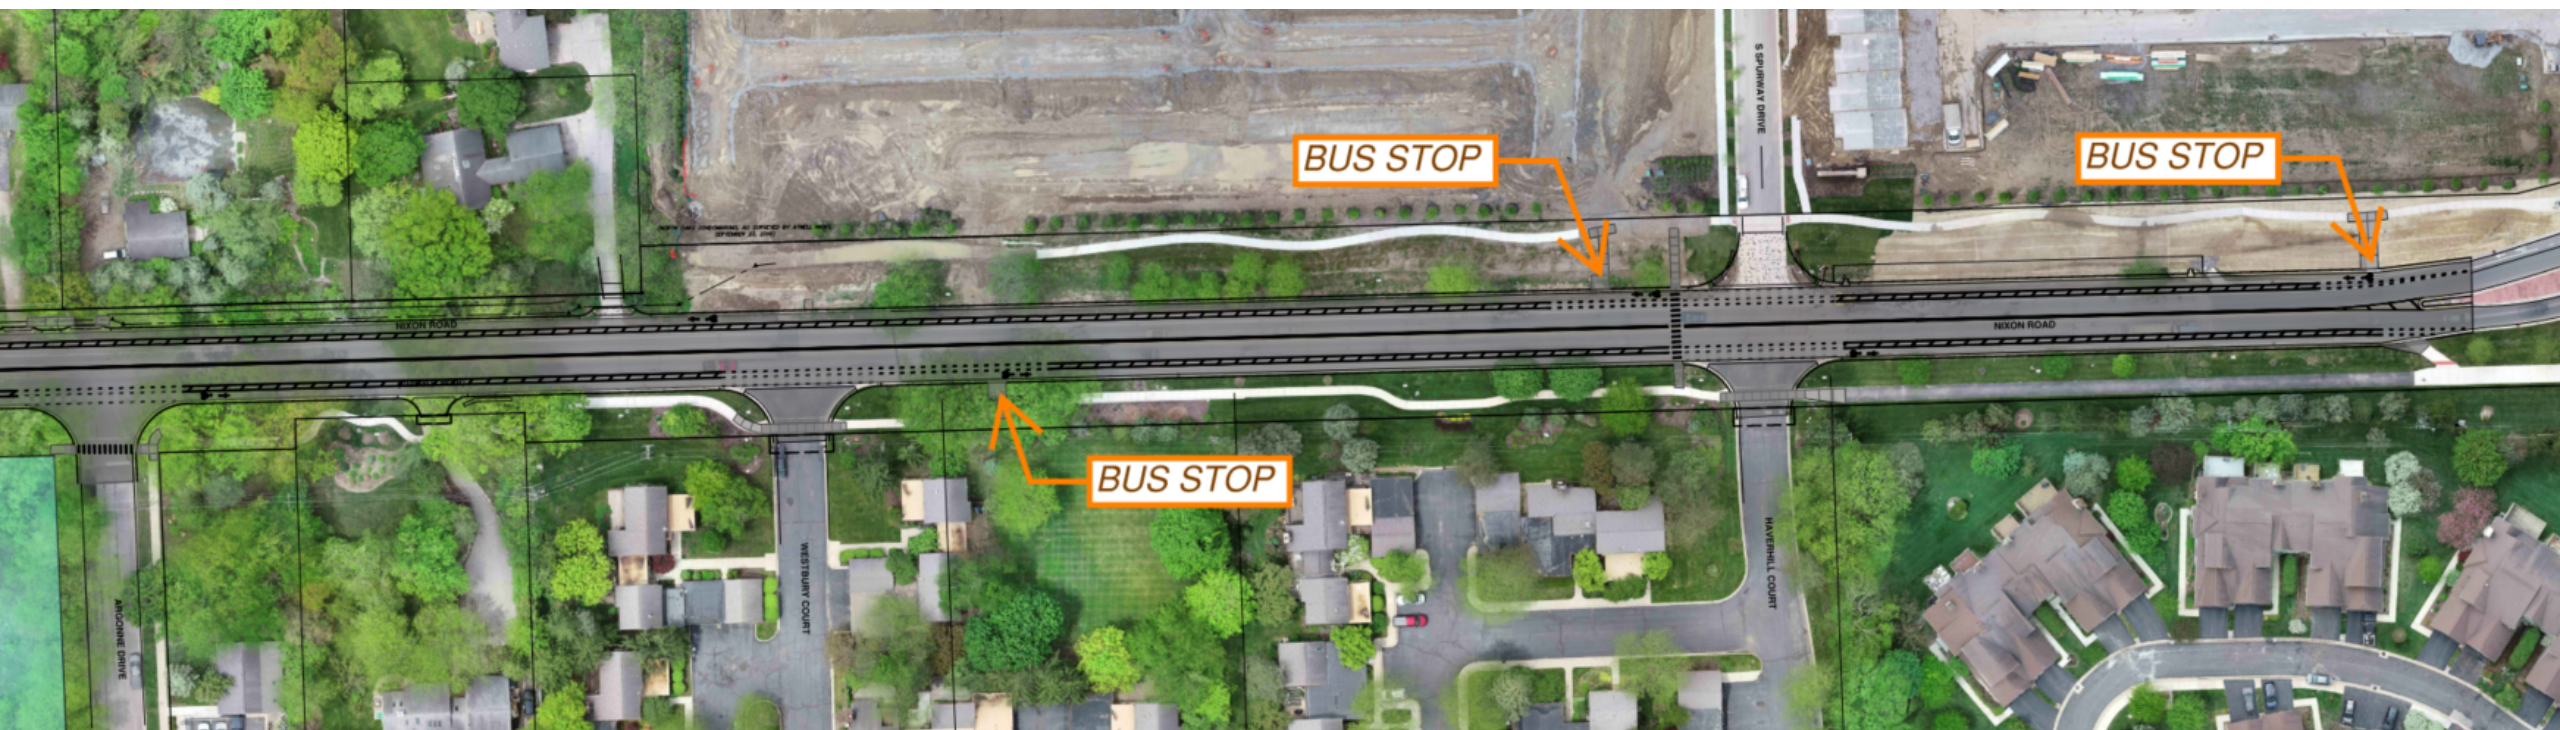

Maintenance of Traffic

Full Detour

Green Rd to Plymouth Rd to Huron Pwky


Additional distance: ~ 1.5 miles

Additional time: ~ 5 minutes

Work Zone Sections

Phase 1:  Tentative Summer 2025
Huron Parkway to 200' south of Bluett Dr

Phase 2:  Tentative Summer 2026
South of Bluett Dr to north of Traver Blvd

Phase 3:  Tentative Fall 2026
North of Traver Blvd to south of Dhu Varren Rd



Maintenance of Traffic

- Detour remains the same for all phases.
- Only one section will be closed at a time.
- The previous phase will be open before moving to the next phase.
- Local access to homes and schools will be maintained
- Pedestrian and bicycle access will be maintained where feasible.
- Phasing is being closely coordinated with adjacent Clague School site development and AAPS officials



Key Dates

2-Year Project

- Mid/late May- Anticipated Construction Start
- Late August 2025 – Complete Phase 1 Construction
- May 2026 or earlier – Begin Phase 2 Construction
- Late Summer 2026 – Begin Phase 3 Construction
- December 2026 - Complete Construction

Stay up to Date!

Nixon Corridor Improvement Project

A full road reconstruction project

+ Follow



Home / Nixon Corridor Improvement Project

Project Overview

The Nixon Road Corridor Improvement Project is a full road reconstruction from just north of the Huron Parkway roundabout to just south of Dhu Varren Road.

+ Project Details

+ Impacts to Me

Project Staff



Christopher Wall

Project Manager

[Email](#)

<https://engage.a2gov.org/nixon-project>

Questions

